


# Diesel Engines 20V 4000 M93/M93L

for Vessels

with Low Load Factors (1DS)

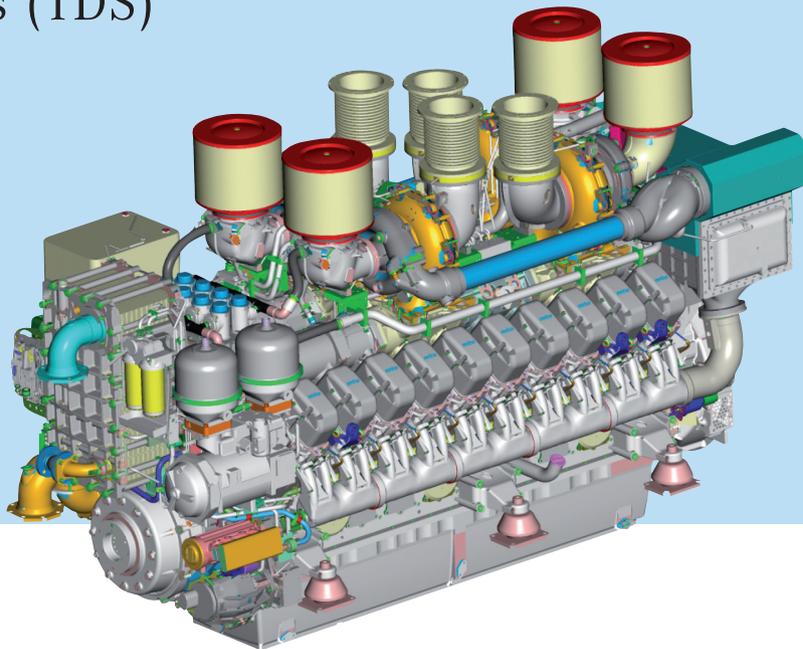

## Typical applications:

Fast yachts, fast patrol boats, police craft and fire-fighting vessels

Engine type		20V 4000 M93	20V 4000 M93L
Rated power ICFN	kW (bhp)	3900 (5240)	4300 (5765)
Speed	rpm	2100	2100
No. of cylinders		20	20
Bore/stroke	mm (in)	170/190 (6.7/7.5)	170/190 (6.7/7.5)
Displacement, total	l (cu in)	86.2 (5260)	86.2 (5260)
Flywheel housing		SAE 00	SAE 00
Gearbox model <sup>2)</sup>		ZF 9055	ZF 23 560 C
Exhaust optimization <sup>1)</sup>		IMO/EPA 2	IMO/EPA 2

Fuel consumption *		20V 4000 M93	20V 4000 M93L
at rated power	g/kWh	213	220
	l/h (gal/h)	982.0 (259.5)	1103.0 (291.5)

\*Tolerance +5% per ISO 3046, diesel fuel to DIN EN 590 with a lower heating value of 42800kJ/kg (18390 BTU/lb)

<sup>1)</sup> IMO - International Maritime Organization

EPA - US marine directive 40 CFR 94, with NTE

<sup>2)</sup> gearbox variants "Down Angle (A)" and "V-Drive" available on request




## Standard equipment

Starting system	Electric starter motor 24V, 2 pole
Oil system	Gear driven lube oil pump, duplex lube oil filter with diverter valve, automatic lube oil filter with centrifuge lube oil heat exchanger, pump for lube oil extraction
Fuel system	Fuel delivery pump, duplex lube fuel filter with diverter valve, common rail fuel injection system with high-pressure pump, pressure accumulator and electronic fuel injection with cylinder cutout system, jacketed HP fuel lines, flame- proof hose lines, leak-off fuel tank level monitoring, fuel pre-filter with water separator
Cooling system	MTU-split-circuit coolant system, electronically controled thermostats, coolant-to-raw water plate core heat exchanger, self priming centrifugal raw water pump, engine mounted coolant expansion tank , gear driven coolant circulation pump, raw-water connection for gearbox oil cooling
Combustion air system	Water cooled charge air manifolds, engine coolant temperature-controlled intercooler, sequential turbocharging with 2 water-cooled turbochargers , on-engine seawater-resistant air filters
Exhaust system	Triple-walled, liquid-cooled, on-engine exhaust manifolds, exhaust bellows, vertical
Mounting system	Resilient mounts
Power transmission	Torsional and offset compensating couplings
Auxiliary PTO	Charging generator, 120A, 28V, 2 pole
Engine management system	Engine control and monitoring system (ADEC), interface to gearbox control, interface to remote control and monitoring system, local operating panel (LOP)
Engine safety system	The scope of delivery for the engine fulfills SOLAS requirements for admissible surface temperature without additional insulation

## Optional equipment

Starting system	Coolant preheating system, air starter
Oil system	Lube oil priming system, oil level monitoring, automatic oil replenishment system, automatic lube oil filter, main and connecting rod bearing temperature monitoring
Cooling system	Engine version for sealed engine coolant system in conjunction with ship`s side recooling system
Auxiliary PTO	Bilgepump, PTOs at free end of engine
Engine management system	Expansion In compliance with classification society regulations
Monitoring / Control system	Fuel consumption measurement device, MTU-monitoring and control systems MCS, remote control systems RCS
Gearbox option	Various reserve reduction gearbox models, elec. actuated, gearbox mounts, PTO for hydraulic pump at driving shaft or at mediate shaft, trolling, trailing pump, propeller shaft flange
Classification	ABS, BV, CCS, CR, DNV, GL, KR, LR, NK, RINA including necessary extensions to scope of supply.

Dimensions and Mass - Engines			
Engine model		20V 4000 M93	20V 4000 M93L
Length [L]	mm (in)	4015 (158,1)	4015 (158,1)
Width [W]	mm (in)	1470 (57.8)	1470 (57.8)
Height [H]	mm (in)	2440 (96.1)	2440 (96.1)
Mass (dry)	kg (lbs)	12310 (27139)	11980 (16411)
Dimensions and Mass - Engines with gearbox			
Gearbox type		ZF 9055	ZF 23 560 C
Length [L']	mm (in)	5570 (219.3)	5720 (225,2)
Width [W]	mm (in)	1470 (57.8)	1470 (57.8)
Height [H']	mm (in)	2610 (102.8)	2440 (96.1)
Mass (dry)	kg (lbs)	13805 (30435)	15015 (33102)

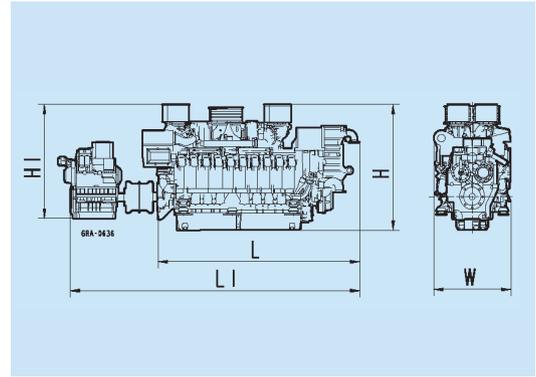

Power definition according ISO 3046; Intake air temperature: 25°C / Sea water temperature: 25°C;

Intake air depression 15 mbar / Exhaust back pressure 30 mbar; Barometric pressure 1000 mbar; Power reduction at 45°C/32°C: 3%.

Specifications are subject to change without notice. All dimensions are approximate. For complete information refer to installations drawing. For further information consult your MTU or MTU Detroit Diesel distributor/dealer.

## Tognum Group Companies

### Europe / Middle East / Africa / Latin America

MTU Friedrichshafen GmbH  
88040 Friedrichshafen  
Germany  
Phone +49 7541 90 7003  
Fax +49 7541 90 7081  
marineregion1@mtu-online.com  
www.mtu-online.com

### Asia / Australia / Pacific

MTU Asia Pte. Ltd.  
1, Benoi Place  
Singapore 629923, Republic of Singapore  
Phone +65 6861 5922  
Fax +65 6861 3615  
marineregion2@mtu-online.com  
www.mtu-online.com.sg

### USA / Canada / Mexico

MTU Detroit Diesel, Inc.  
13400 Outer Drive West  
Detroit, Michigan 48239, USA  
Phone +1 313 592 7806  
Fax +1 313 592 5137  
marineregion3@mtu-online.com  
www.mtudetroitdiesel.com